

PIP-KRSH_501FA

▶ Operating temperatures 261°C(501°F) to 538°C(1000°F)



TECHNICAL CHARACTERISTICS

Insulation material _ 538°C (1000°F)

E-glass fibers fabricated in mat form _ ASTM C1086

Inner liner

Fiberglass fabric impregnated with **PTFE** bases resin having a min. weight of 540g/m²_ ASTM D3776


For operating temperatures 261°C (501°F) to 538°C(1000°F)

Outer jacket

Fiberglass fabric impregnated with **silicone** bases resin having a min. weight of 540g/m²_ ASTM D3776

Accessories

All hardware such as D-ring, buckles, tags, etc., Type SUS316
 Machine stitching, kevlar-coated stainless steel thread

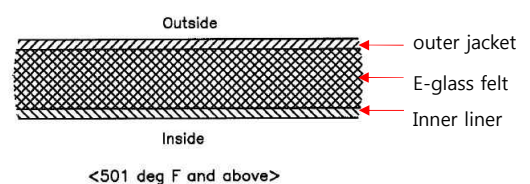



PIP-KRSH_501FA

APPLICATION

Marine Applications

- Installs around engine exhaust manifold associated piping
- Reduces risk of personnel injuries
- Internal and external pipings, Flanges, Valves and Equipment

Power Generation & Turbines

- Exhaust systems, Exhaust skids, Expansion joints & Flanges
- Mainfolds, Mufflers,

Industrial

- Valves and Flange
- Pumps and Equipment, Instrumentation
- Tubing lines and piping

Oil and Gas industry

- Platform piping
- Valves & Flange
- Equipment

Pipe Size or O.D. (NPS) (in.)	Operating Temperature, °C																					
	To 75	76 to 100	101 to 125	126 to 150	151 to 175	176 to 200	201 to 225	226 to 250	251 to 275	276 to 300	301 to 325	326 to 350	351 to 375	376 to 400	401 to 425	426 to 450	451 to 475	476 to 500	501 to 525	526 to 538	to	to
1 and less	25	25	25	25	25	25	25	25	25	25	25	40	40	40	40	50	50	50	65	65		
1 1/2	25	25	25	25	25	25	25	25	25	25	40	40	40	40	50	50	50	65	65	65		
2	25	25	25	25	25	25	25	25	25	25	40	40	40	40	50	50	50	65	65	65	75	
3	25	25	25	25	25	25	25	25	25	40	40	40	40	50	50	50	65	65	65	75	75	
4	25	25	25	25	25	25	25	25	25	40	40	40	40	50	50	50	65	65	75	75		
6	25	25	25	25	25	25	25	25	40	40	40	40	50	50	50	65	65	75	75			
8	25	25	25	25	25	25	25	40	40	40	40	50	50	50	65	65	75	75				
10	25	25	25	25	25	25	40	40	40	40	50	50	50	65	65	75	75					
12	25	25	25	25	25	25	40	40	40	40	50	50	50	65	65	75	75					
14	25	25	25	25	25	25	40	40	40	40	50	50	50	65	65	75	75					
16	25	25	25	25	25	25	40	40	40	40	50	50	50	65	65	75	75					
18	25	25	25	25	25	25	40	40	40	40	50	50	50	65	65	75	75					
20	25	25	25	25	25	25	40	40	40	40	50	50	50	65	65	75	75					
24	25	25	25	25	25	25	40	40	40	40	50	50	50	65	65	75	75					
30	25	25	25	25	25	25	40	40	40	40	50	50	50	65	65	75	75					
36	25	25	25	25	25	25	40	40	40	40	50	50	50	65	65	75	75					
>36 to Flat	25	25	25	25	25	40	40	50	50	65	75	75										

NOTES:

- Insulation thicknesses are based on design parameters in PIP INSR1000 Table 1 for personnel protection, using maximum thermal conductivity for glass fiber felt insulation in accordance with ASTM C1086.

Hot Insulation Thickness - 1998 Design Parameters

Personnel Protection Design Wind Speed	1 m/s (2 mph)
Personnel Protection Design Summer Dry Bulb Temperature	35°C (95°F)
Personnel Protection Maximum Surface Temperature	60°C (140°F)
Emittance of Existing Surface	0.9